

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 April 2001 (12.04.2001)

PCT

(10) International Publication Number
WO 01/25593 A1

(51) International Patent Classification⁷: E21B 33/072

(74) Agent: J.K. THORSENS PATENTBUREAU A/S; P.O.
Box 9276 Grønland, N-0134 Oslo (NO).

(21) International Application Number: PCT/NO00/00318

(22) International Filing Date:
28 September 2000 (28.09.2000)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
19994784 1 October 1999 (01.10.1999) NO

(71) Applicant (for all designated States except US): KONGS-
BERG OFFSHORE AS [NO/NO]; Box 1012, N-3601
Kongsberg (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HOEL, Karl-Willie
[NO/NO]; Heggedalskogen 50, N-1389 Heggedal (NO).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

[Continued on next page]

(54) Title: SUBSEA LUBRICATOR DEVICE AND METHODS OF CIRCULATING FLUIDS IN A SUBSEA LUBRICATOR

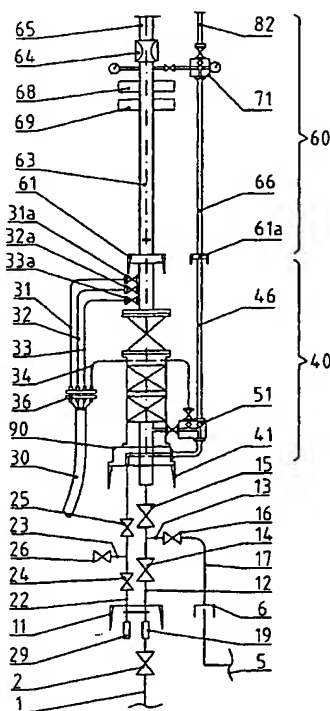

(57) Abstract: Subsea lubricator device, comprising a blowout preventer assembly, a tool housing assembly and a stuffing box, intended to be located at a subsea Christmas tree, and methods of circulating fluids in a subsea lubricator. The device comprises a blowout preventer (40) and a lubricator (60). Along the entire length of the device a bypass (46, 66) is located. The bypass communicates fluid with the device via a fluid connection (72) at the upper end of the tool housing and via a valve assembly (51) at the bottom of the blowout preventer. This permits removal of gas or oil being present in the device by circulating the hydrocarbons in the well.

WO 01/25593 A1

WO 01/25593 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.